




Centre Tecnològic de Transferència de Calor  
UNIVERSITAT POLITÈCNICA DE CATALUNYA

# Tackling turbulence with (super)computers at CTTC

F.Xavier Trias

Heat and Mass Transfer Technological Center, Technical University of Catalonia

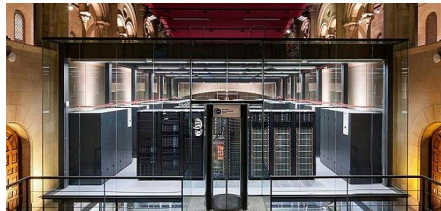



Centre Tecnològic de Transferència de Calor  
UNIVERSITAT POLITÈCNICA DE CATALUNYA

# Tackling turbulence with (super)computers at CTTC

F.Xavier Trias

Heat and Mass Transfer Technological Center, Technical University of Catalonia





Centre Tecnològic de Transferència de Calor  
UNIVERSITAT POLITÈCNICA DE CATALUNYA

# Tackling turbulence with (super)computers at CTTC

F.Xavier Trias

Heat and Mass Transfer Technological Center, Technical University of Catalonia





Centre Tecnològic de Transferència de Calor  
UNIVERSITAT POLITÈCNICA DE CATALUNYA

# Preserving operator symmetries? Physical, numerical and computational implications

F.Xavier Trias

Heat and Mass Transfer Technological Center, Technical University of Catalonia






# Contents

- 1 CFD and HPC at CTTC
- 2 Symmetry-preserving schemes
- 3 Multiphase flows
- 4 Algebra-based HPC implementation
- 5 Conclusions




# The CTTC research group


Heat and Mass Transfer Technological Center (Catalan: *Centre Tecnològic de Transferència de Calor*) has more than 20 years experience on CFD:

- **Fundamental research** on **numerical methods**, **fluid dynamics** and **heat and mass transfer** phenomena.
- **Applied research** on thermal and fluid dynamic optimization of thermal system and equipment.



# CTTC's historical background in HPC

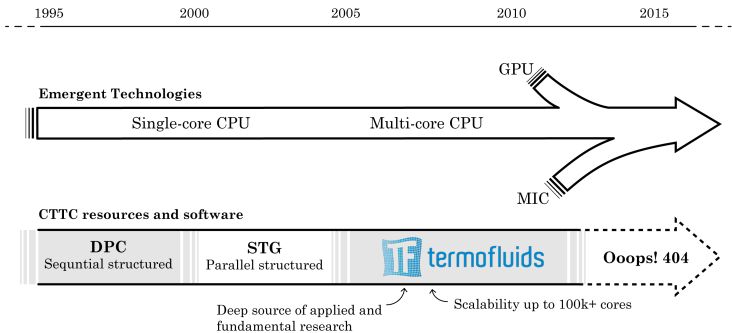

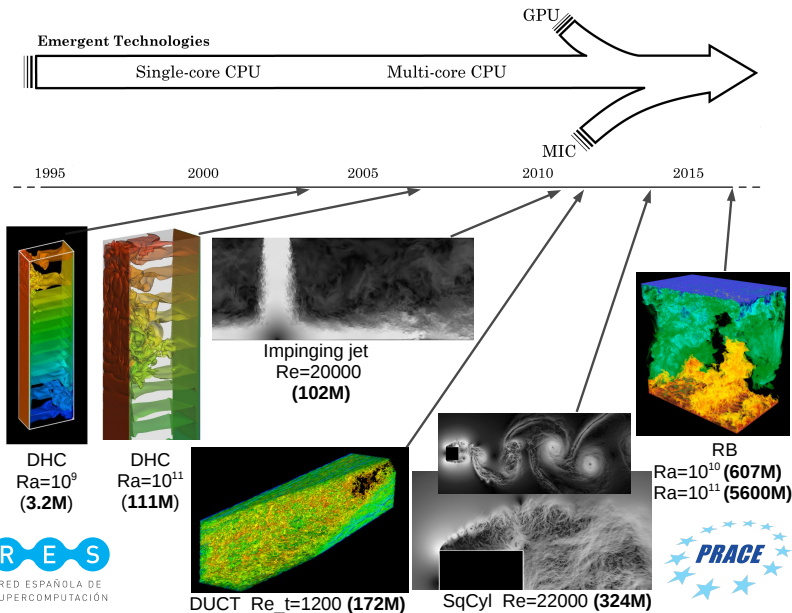



Let's begin with some math...

$$\langle \nabla \cdot \vec{a} | \phi \rangle = -\langle \vec{a} | \nabla \phi \rangle$$

$$\langle \nabla^2 f | g \rangle = -\langle \nabla f | \nabla g \rangle = \langle f | \nabla^2 g \rangle$$

$$\langle C(\vec{u}, \phi_1) | \phi_2 \rangle = -\langle C(\vec{u}, \phi_2) | \phi_1 \rangle \quad \text{if } \nabla \cdot \vec{u} = 0$$

$$\langle \nabla \times \vec{a} | \vec{b} \rangle = \langle \vec{a} | \nabla \times \vec{b} \rangle$$

**Notation:**

$$\langle a | b \rangle := \int_{\Omega} ab \, d\Omega \quad C(\vec{u}, \phi) := (\vec{u} \cdot \nabla) \phi$$

**REMEMBER:** we always assume **no contribution from domain boundary,  $\partial \Omega$**

# Let's begin with some math...

$$\langle \nabla \cdot \vec{a} | \phi \rangle = -\langle \vec{a} | \nabla \phi \rangle$$

*Proof:*

$$\nabla \cdot (\phi \vec{a}) = \phi \nabla \cdot \vec{a} + \vec{a} \cdot \nabla \phi$$

$$\int_{\Omega} \nabla \cdot (\phi \vec{a}) = \langle \phi | \nabla \cdot \vec{a} \rangle + \langle \vec{a} | \nabla \phi \rangle$$

$$\int_{\partial \Omega} (\phi \vec{a}) \cdot \vec{n} dS = \langle \phi | \nabla \cdot \vec{a} \rangle + \langle \vec{a} | \nabla \phi \rangle = 0$$



REMAINDER!!!

$$\langle a | b \rangle := \int_{\Omega} ab d\Omega$$

**REMEMBER:** we always assume **no contribution from domain boundary,  $\partial \Omega$**

# Operator symmetries and conservation

$\langle \vec{u} | \vec{u} \rangle$  Kinetic energy (in 2D/3D)

$$\begin{aligned} \frac{1}{2} \frac{d \langle \vec{u} | \vec{u} \rangle}{dt} &= \left\langle \frac{\partial \vec{u}}{\partial t} \middle| \vec{u} \right\rangle = - \langle C(\vec{u}, \vec{u}) | \vec{u} \rangle + \nu \langle \nabla^2 \vec{u} | \vec{u} \rangle - \langle \nabla p | \vec{u} \rangle \\ &= -\nu \langle \nabla \vec{u} | \nabla \vec{u} \rangle = -\nu \|\nabla \vec{u}\|^2 \leq 0 \\ &= -\nu \langle \nabla \times \nabla \times \vec{u} | \vec{u} \rangle = -\nu \|\omega\|^2 \leq 0 \end{aligned}$$

If  $\nu=0$ , then  $\langle \vec{u} | \vec{u} \rangle$  remains constant!!!

Also, if the flow is irrotational,  $\vec{\omega} = \vec{0}$ . Remember Bernoulli!

**ADDITIONAL REMAINDER!!!**

$$\nabla^2 \vec{u} = \nabla(\nabla \cdot \vec{u}) - \nabla \times \nabla \times \vec{u}$$

**REMAINDER!!!**

$$\langle \nabla \cdot \vec{a} | \phi \rangle = - \langle \vec{a} | \nabla \phi \rangle$$

$$\langle \nabla^2 f | g \rangle = - \langle \nabla f | \nabla g \rangle = \langle f | \nabla^2 g \rangle$$

$$\langle C(\vec{u}, \phi_1) | \phi_2 \rangle = - \langle C(\vec{u}, \phi_2) | \phi_1 \rangle \quad \text{if } \nabla \cdot \vec{u} = 0$$

$$\langle \nabla \times \vec{a} | \vec{b} \rangle = \langle \vec{a} | \nabla \times \vec{b} \rangle$$

# From Calculus to Algebra (C2A)

$$\langle a|b \rangle := \int_{\Omega} a b d\Omega \in \mathbb{R}$$

$$\langle a_h|b_h \rangle := a_h^T \mathbf{\Omega} b_h \in \mathbb{R}$$

● <sup>1</sup>	● <sup>2</sup>	● <sup>3</sup>
● <sup>4</sup>	● <sup>5</sup>	● <sup>6</sup>

$$a_h = \begin{pmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ a_5 \\ a_6 \end{pmatrix} \quad \mathbf{\Omega} = \begin{pmatrix} \Omega_1 & 0 & 0 & 0 & 0 & 0 \\ 0 & \Omega_2 & 0 & 0 & 0 & 0 \\ 0 & 0 & \Omega_3 & 0 & 0 & 0 \\ 0 & 0 & 0 & \Omega_4 & 0 & 0 \\ 0 & 0 & 0 & 0 & \Omega_5 & 0 \\ 0 & 0 & 0 & 0 & 0 & \Omega_6 \end{pmatrix} \quad b_h = \begin{pmatrix} b_1 \\ b_2 \\ b_3 \\ b_4 \\ b_5 \\ b_6 \end{pmatrix}$$

# From Calculus to Algebra (C2A)

$$\langle a|b \rangle := \int_{\Omega} a b d\Omega \in \mathbb{R}$$

$$\langle a_h|b_h \rangle := a_h^T \mathbf{\Omega} b_h \in \mathbb{R}$$


● <sup>3</sup>	● <sup>5</sup>	● <sup>1</sup>
● <sup>6</sup>	● <sup>2</sup>	● <sup>4</sup>

$$a_h = \begin{pmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ a_5 \\ a_6 \end{pmatrix} \quad \mathbf{\Omega} = \begin{pmatrix} \Omega_1 & 0 & 0 & 0 & 0 & 0 \\ 0 & \Omega_2 & 0 & 0 & 0 & 0 \\ 0 & 0 & \Omega_3 & 0 & 0 & 0 \\ 0 & 0 & 0 & \Omega_4 & 0 & 0 \\ 0 & 0 & 0 & 0 & \Omega_5 & 0 \\ 0 & 0 & 0 & 0 & 0 & \Omega_6 \end{pmatrix} \quad b_h = \begin{pmatrix} b_1 \\ b_2 \\ b_3 \\ b_4 \\ b_5 \\ b_6 \end{pmatrix}$$

# From Calculus to Algebra (C2A)

$$\langle a|b \rangle := \int_{\Omega} ab d\Omega \in \mathbb{R}$$

$$\langle a_h|b_h \rangle := a_h^T \Omega b_h \in \mathbb{R}$$




$$a_h = \begin{pmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ a_5 \\ a_6 \end{pmatrix} \quad \Omega = \begin{pmatrix} \Omega_1 & 0 & 0 & 0 & 0 & 0 \\ 0 & \Omega_2 & 0 & 0 & 0 & 0 \\ 0 & 0 & \Omega_3 & 0 & 0 & 0 \\ 0 & 0 & 0 & \Omega_4 & 0 & 0 \\ 0 & 0 & 0 & 0 & \Omega_5 & 0 \\ 0 & 0 & 0 & 0 & 0 & \Omega_6 \end{pmatrix} \quad b_h = \begin{pmatrix} b_1 \\ b_2 \\ b_3 \\ b_4 \\ b_5 \\ b_6 \end{pmatrix}$$

# From Calculus to Algebra (C2A)

$$\frac{\partial \vec{u}}{\partial t} + (\vec{u} \cdot \nabla) \vec{u} = \nu \nabla^2 \vec{u} - \nabla p \quad \nabla \cdot \vec{u} = 0$$

$$\Omega \frac{d u_h}{d t} + C(u_h) u_h = D u_h - \Omega G p_h \quad M u_h = 0_h$$

$$p_h(t) = \begin{pmatrix} p_1 \\ p_2 \\ p_3 \\ p_4 \\ p_5 \\ p_6 \end{pmatrix} \quad u_h(t) = \begin{pmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \\ u_5 \\ u_6 \\ v_1 \\ v_2 \\ v_3 \\ v_4 \\ v_5 \\ v_6 \end{pmatrix}$$



$$r = \begin{pmatrix} \times & 0 & 0 & \times & \times & 0 \\ 0 & \times & \times & \times & 0 & \times \\ 0 & \times & \times & 0 & 0 & \times \\ \times & \times & 0 & \times & 0 & 0 \\ \times & 0 & 0 & 0 & \times & \times \\ 0 & \times & \times & 0 & \times & \times \end{pmatrix}$$

$$\Omega = \begin{pmatrix} \Omega_u & \\ & \Omega_v \end{pmatrix}$$


$$\Omega_u = \Omega_v = \begin{pmatrix} \Omega_1 & 0 & 0 & 0 & 0 & 0 \\ 0 & \Omega_2 & 0 & 0 & 0 & 0 \\ 0 & 0 & \Omega_3 & 0 & 0 & 0 \\ 0 & 0 & 0 & \Omega_4 & 0 & 0 \\ 0 & 0 & 0 & 0 & \Omega_5 & 0 \\ 0 & 0 & 0 & 0 & 0 & \Omega_6 \end{pmatrix}$$

# From Calculus to Algebra (C2A)

$$\frac{\partial \vec{u}}{\partial t} + (\vec{u} \cdot \nabla) \vec{u} = \nu \nabla^2 \vec{u} - \nabla p \quad \nabla \cdot \vec{u} = 0$$

$$\Omega \frac{d u_h}{d t} + C(u_h) u_h = D u_h - \Omega G p_h \quad M u_h = 0_h \quad p_h(t) = \begin{pmatrix} p_1 \\ p_2 \\ p_3 \\ p_4 \\ p_5 \\ p_6 \end{pmatrix}$$

$$u_h(t) = \begin{pmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \\ u_5 \\ u_6 \\ v_1 \\ v_2 \\ v_3 \\ v_4 \\ v_5 \\ v_6 \end{pmatrix}$$



$$d_{14} = \nu A_{14} / \delta_{14}$$

$$D = \begin{pmatrix} D_u & \\ & D_v \end{pmatrix}$$


$$r = \begin{pmatrix} \times & 0 & 0 & \times & \times & 0 \\ 0 & \times & \times & \times & 0 & \times \\ 0 & \times & \times & 0 & 0 & \times \\ \times & \times & 0 & \times & 0 & 0 \\ \times & 0 & 0 & 0 & \times & \times \\ 0 & \times & \times & 0 & \times & \times \end{pmatrix}$$

$$D_u = D_v = \begin{pmatrix} d_{11} & 0 & 0 & d_{14} & d_{15} & 0 \\ 0 & d_{22} & d_{23} & d_{24} & 0 & d_{26} \\ 0 & d_{23} & d_{33} & 0 & 0 & d_{36} \\ d_{14} & d_{24} & 0 & d_{44} & 0 & 0 \\ d_{15} & 0 & 0 & 0 & d_{55} & d_{56} \\ 0 & d_{26} & d_{36} & 0 & d_{56} & d_{66} \end{pmatrix}$$



# From Calculus to Algebra (C2A)

$$\frac{\partial \vec{u}}{\partial t} + (\vec{u} \cdot \nabla) \vec{u} = \nu \nabla^2 \vec{u} - \nabla p \quad \nabla \cdot \vec{u} = 0$$
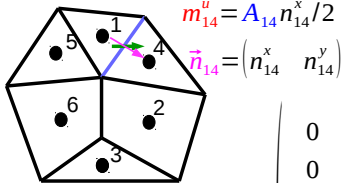
$$\Omega \frac{d u_h}{d t} + C(u_h) u_h = D u_h - \Omega G p_h \quad M u_h = 0_h \quad p_h(t) = \begin{pmatrix} p_1 \\ p_2 \\ p_3 \\ p_4 \\ p_5 \\ p_6 \end{pmatrix} \quad u_h(t) = \begin{pmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \\ u_5 \\ u_6 \\ v_1 \\ v_2 \\ v_3 \\ v_4 \\ v_5 \\ v_6 \end{pmatrix}$$


$m_{14}^u = A_{14} n_{14}^x / 2$   
 $\vec{n}_{14} = \begin{pmatrix} n_{14}^x & n_{14}^y \end{pmatrix}$

$$M = \begin{pmatrix} M^u & M^v \end{pmatrix}$$

$$M^u = \begin{pmatrix} 0 & 0 & 0 & m_{14}^u & m_{15}^u & 0 \\ 0 & 0 & m_{23}^u & m_{24}^u & 0 & m_{26}^u \\ 0 & -m_{23}^u & 0 & 0 & 0 & m_{36}^u \\ -m_{14}^u & -m_{24}^u & 0 & 0 & 0 & 0 \\ -m_{15}^u & 0 & 0 & 0 & 0 & m_{56}^u \\ 0 & -m_{26}^u & -m_{36}^u & 0 & -m_{56}^u & 0 \end{pmatrix}$$


$$r = \begin{pmatrix} \times & 0 & 0 & \times & \times & 0 \\ 0 & \times & \times & \times & 0 & \times \\ 0 & \times & \times & 0 & 0 & \times \\ \times & \times & 0 & \times & 0 & 0 \\ \times & 0 & 0 & 0 & \times & \times \\ 0 & \times & \times & 0 & \times & \times \end{pmatrix}$$

# From Calculus to Algebra (C2A)

$$\frac{\partial \vec{u}}{\partial t} + (\vec{u} \cdot \nabla) \vec{u} = \nu \nabla^2 \vec{u} - \nabla p \quad \nabla \cdot \vec{u} = 0$$

$$\Omega \frac{d u_h}{d t} + C(u_h) u_h = D u_h - \Omega G p_h \quad M u_h = 0_h$$

$$p_h(t) = \begin{pmatrix} p_1 \\ p_2 \\ p_3 \\ p_4 \\ p_5 \\ p_6 \end{pmatrix} \quad u_h(t) = \begin{pmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \\ u_5 \\ u_6 \\ v_1 \\ v_2 \\ v_3 \\ v_4 \\ v_5 \\ v_6 \end{pmatrix}$$



$$r = \begin{pmatrix} \times & 0 & 0 & \times & \times & 0 \\ 0 & \times & \times & \times & 0 & \times \\ 0 & \times & \times & 0 & 0 & \times \\ \times & \times & 0 & \times & 0 & 0 \\ \times & 0 & 0 & 0 & \times & \times \\ 0 & \times & \times & 0 & \times & \times \end{pmatrix}$$

$$G = \begin{pmatrix} G^x \\ G^y \end{pmatrix}$$


$$G^x = \begin{pmatrix} 0 & 0 & 0 & g_{14}^x & g_{15}^x & 0 \\ 0 & 0 & g_{23}^x & g_{24}^x & 0 & g_{26}^x \\ 0 & -g_{23}^x & 0 & 0 & 0 & g_{36}^x \\ -g_{14}^x & -g_{24}^x & 0 & 0 & 0 & 0 \\ -g_{15}^x & 0 & 0 & 0 & 0 & g_{56}^x \\ 0 & -g_{26}^x & -g_{36}^x & 0 & -g_{56}^x & 0 \end{pmatrix}$$

# From Calculus to Algebra (C2A)

$$\frac{\partial \vec{u}}{\partial t} + (\vec{u} \cdot \nabla) \vec{u} = \nu \nabla^2 \vec{u} - \nabla p \quad \nabla \cdot \vec{u} = 0$$

$$\Omega \frac{d u_h}{d t} + \mathbf{C}(u_h) u_h = \mathbf{D} u_h - \Omega \mathbf{G} p_h \quad \mathbf{M} u_h = 0_h$$

$$p_h(t) = \begin{pmatrix} p_1 \\ p_2 \\ p_3 \\ p_4 \\ p_5 \\ p_6 \end{pmatrix} \quad u_h(t) = \begin{pmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \\ u_5 \\ u_6 \\ v_1 \\ v_2 \\ v_3 \\ v_4 \\ v_5 \\ v_6 \end{pmatrix}$$



$$c_{14} = A_{14} U_{14}$$

$$\mathbf{C} = \begin{pmatrix} C_u & \\ & C_v \end{pmatrix}$$


$$r = \begin{pmatrix} \times & 0 & 0 & \times & \times & 0 \\ 0 & \times & \times & \times & 0 & \times \\ 0 & \times & \times & 0 & 0 & \times \\ \times & \times & 0 & \times & 0 & 0 \\ \times & 0 & 0 & 0 & \times & \times \\ 0 & \times & \times & 0 & \times & \times \end{pmatrix}$$

$$\mathbf{C}_u = \mathbf{C}_v = \begin{pmatrix} c_{11} & 0 & 0 & c_{14} & c_{15} & 0 \\ 0 & c_{22} & c_{23} & c_{24} & 0 & c_{26} \\ 0 & c_{32} & c_{33} & 0 & 0 & c_{36} \\ c_{41} & c_{42} & 0 & c_{44} & 0 & 0 \\ c_{51} & 0 & 0 & 0 & c_{55} & c_{56} \\ 0 & c_{62} & c_{63} & 0 & c_{65} & c_{66} \end{pmatrix}$$

# Algebraic operators

$$\frac{\partial \vec{u}}{\partial t} + (\vec{u} \cdot \nabla) \vec{u} = \nu \nabla^2 \vec{u} - \nabla p \quad \nabla \cdot \vec{u} = 0$$

$$\Omega \frac{d \mathbf{u}_h}{dt} + \mathbf{C}(\mathbf{u}_h) \mathbf{u}_h = \mathbf{D} \mathbf{u}_h - \Omega \mathbf{G} p_h \quad \mathbf{M} \mathbf{u}_h = 0_h$$



$$\Omega = \begin{pmatrix} \Omega_u & \\ & \Omega_v \end{pmatrix}$$

$$\mathbf{M} = \begin{pmatrix} \mathbf{M}^u & \mathbf{M}^v \end{pmatrix}$$

$$\mathbf{G} = \begin{pmatrix} \mathbf{G}^x \\ \mathbf{G}^y \end{pmatrix}$$

$$\mathbf{T} = \begin{pmatrix} \times & 0 & 0 & \times & \times & 0 \\ 0 & \times & \times & \times & 0 & \times \\ 0 & \times & \times & 0 & 0 & \times \\ \times & \times & 0 & \times & 0 & 0 \\ \times & 0 & 0 & 0 & \times & \times \\ 0 & \times & \times & 0 & \times & \times \end{pmatrix}$$

$$\mathbf{C} = \begin{pmatrix} \mathbf{C}_u & \\ & \mathbf{C}_v \end{pmatrix}$$

$$\mathbf{D} = \begin{pmatrix} \mathbf{D}_u & \\ & \mathbf{D}_v \end{pmatrix}$$

# Algebraic operators

$$\frac{\partial \vec{u}}{\partial t} + (\vec{u} \cdot \nabla) \vec{u} = \nu \nabla^2 \vec{u} - \nabla p \quad \nabla \cdot \vec{u} = 0 \quad \langle a|b \rangle := \int_{\Omega} a b d\Omega$$

$$\Omega \frac{d \mathbf{u}_h}{dt} + \mathbf{C}(u_h) u_h = \mathbf{D} u_h - \Omega \mathbf{G} p_h \quad \mathbf{M} u_h = 0_h \quad \langle a_h|b_h \rangle := a_h^T \Omega b_h$$

Let's consider the time evolution of  $1/2 \langle u_h | u_h \rangle \dots$

$$\frac{1}{2} \frac{d \langle u_h | u_h \rangle}{dt} = u_h^T \Omega \frac{d u_h}{dt} = -u_h^T \mathbf{C}(u_h) u_h + u_h^T \mathbf{D} u_h - u_h^T \Omega \mathbf{G} p_h$$

$$= u_h^T \mathbf{D} u_h \leq 0$$


...mimicking the properties of continuous NS eqs leads to

REMAINDER!!!

$$\frac{1}{2} \frac{d \langle \vec{u} | \vec{u} \rangle}{dt} = \langle \frac{\partial \vec{u}}{\partial t} | \vec{u} \rangle = -\langle \mathbf{C}(\vec{u}, \vec{u}) | \vec{u} \rangle + \nu \langle \nabla^2 \vec{u} | \vec{u} \rangle - \langle \nabla p | \vec{u} \rangle$$

$$= -\nu \langle \nabla \vec{u} | \nabla \vec{u} \rangle = -\nu \|\nabla \vec{u}\|^2 \leq 0$$

$$= -\nu \langle \nabla \times \nabla \times \vec{u} | \vec{u} \rangle = -\nu \|\omega\|^2 \leq 0$$

 **Numerical stability!!!**

# Algebraic operators

$$\begin{aligned} \frac{1}{2} \frac{d\langle u_h | u_h \rangle}{dt} &= u_h^T \Omega \frac{d u_h}{dt} = -u_h^T C(u_h) u_h + u_h^T D u_h - u_h^T \Omega G p_h \\ &= u_h^T D u_h \leq 0, \quad \text{if } M u_h = 0_h, \quad \forall u_h, p_h \end{aligned}$$

$$u_h^T C(u_h) u_h = 0 \quad \longrightarrow \quad C(u_h) = -C^T(u_h)$$

$$u_h^T \Omega G p_h = 0 \quad \longrightarrow \quad \Omega G = -M^T$$

$$u_h^T D u_h \leq 0 \quad \longrightarrow \quad D = D^T \text{ def-}$$

## REMAINDER!!!


$$\begin{aligned} \frac{1}{2} \frac{d\langle \tilde{u} | \tilde{u} \rangle}{dt} &= \langle \frac{\partial \tilde{u}}{\partial t} | \tilde{u} \rangle = -\langle C(\tilde{u}, \tilde{u}) | \tilde{u} \rangle + \nu \langle \nabla^2 \tilde{u} | \tilde{u} \rangle - \langle \nabla p | \tilde{u} \rangle \\ &= -\nu \langle \nabla \tilde{u} | \nabla \tilde{u} \rangle = -\nu \|\nabla \tilde{u}\|^2 \leq 0 \\ &= -\nu \langle \nabla \times \nabla \times \tilde{u} | \tilde{u} \rangle = -\nu \|\omega\|^2 \leq 0 \end{aligned}$$

## REMAINDER!!!

$$\begin{aligned} \langle \nabla \cdot \tilde{a} | \phi \rangle &= -\langle \tilde{a} | \nabla \phi \rangle \\ \langle \nabla^2 f | g \rangle &= -\langle \nabla f | \nabla g \rangle = \langle f | \nabla^2 g \rangle \\ \langle C(\tilde{u}, \phi_1) | \phi_2 \rangle &= -\langle C(\tilde{u}, \phi_2) | \phi_1 \rangle \quad \text{if } \nabla \cdot \tilde{u} = 0 \\ \langle \nabla \times \tilde{a} | \tilde{b} \rangle &= \langle \tilde{a} | \nabla \times \tilde{b} \rangle \end{aligned}$$

# Algebraic operators

$$\Omega \frac{d u_h}{dt} + C(u_h) u_h = D u_h - \Omega G p_h \quad M u_h = 0_h$$



$$T = \begin{pmatrix} \times & 0 & 0 & \times & \times & 0 \\ 0 & \times & \times & \times & 0 & \times \\ 0 & \times & \times & 0 & 0 & \times \\ \times & \times & 0 & \times & 0 & 0 \\ \times & 0 & 0 & 0 & \times & \times \\ 0 & \times & \times & 0 & \times & \times \end{pmatrix}$$

$$\Omega = \begin{pmatrix} \Omega_u & \\ & \Omega_v \end{pmatrix}$$

$$M = \begin{pmatrix} M^u & M^v \end{pmatrix}$$

$$\Omega G = -M^T$$

$$G = \begin{pmatrix} G^x \\ G^y \end{pmatrix}$$

$$D_u = D_v = M G = -M \Omega^{-1} M^T$$

$$C = \begin{pmatrix} C_u & \\ & C_v \end{pmatrix}$$

$$D = \begin{pmatrix} D_u & \\ & D_v \end{pmatrix}$$

# From Calculus to Algebra (C2A)

$$\frac{\partial \vec{u}}{\partial t} + (\vec{u} \cdot \nabla) \vec{u} = \nu \nabla^2 \vec{u} - \nabla p; \quad \nabla \cdot \vec{u} = 0$$

C2A

$$\Omega \frac{d u_h}{dt} + C(u_h) u_h = D u_h - \Omega G p_h; \quad M u_h = 0_h$$

$$\langle a | b \rangle := \int_{\Omega} a b d\Omega$$

$$\longrightarrow \langle a_h | b_h \rangle := a_h^T \Omega b_h$$

$$\langle C(\vec{u}, \phi_1) | \phi_2 \rangle = -\langle C(\vec{u}, \phi_2) | \phi_1 \rangle$$

$$\longrightarrow C(u_h) = -C^T(u_h)$$

$$\langle \nabla \cdot \vec{a} | \phi \rangle = -\langle \vec{a} | \nabla \phi \rangle$$

$$\longrightarrow \Omega G = -M^T$$

$$\langle \nabla^2 f | g \rangle = \langle f | \nabla^2 g \rangle$$

$$\longrightarrow D = D^T \text{ def-}$$

## REMAINDER!!!

$$\langle \nabla \cdot \vec{a} | \phi \rangle = -\langle \vec{a} | \nabla \phi \rangle$$

$$\langle \nabla^2 f | g \rangle = -\langle \nabla f | \nabla g \rangle = \langle f | \nabla^2 g \rangle$$

$$\langle C(\vec{u}, \phi_1) | \phi_2 \rangle = -\langle C(\vec{u}, \phi_2) | \phi_1 \rangle \quad \text{if } \nabla \cdot \vec{u} = 0$$

$$\langle \nabla \times \vec{a} | \vec{b} \rangle = \langle \vec{a} | \nabla \times \vec{b} \rangle$$

$$u_h^T C(u_h) u_h = 0 \longrightarrow C(u_h) = -C^T(u_h)$$

$$u_h^T \Omega G p_h = 0 \longrightarrow \Omega G = -M^T$$

$$u_h^T D u_h \leq 0 \longrightarrow D = D^T \text{ def-}$$






ELSEVIER

Contents lists available at ScienceDirect

## Journal of Computational Physics

[www.elsevier.com/locate/jcp](http://www.elsevier.com/locate/jcp)

## Symmetry-preserving discretization of Navier–Stokes equations on collocated unstructured grids

F.X. Trias<sup>a,b</sup>, O. Lehmkuhl<sup>a,c</sup>, A. Oliva<sup>a,\*,1</sup>, C.D. Pérez-Segarra<sup>a</sup>,  
R.W.C.P. Verstappen<sup>b</sup><sup>a</sup> Heat and Mass Transfer Technological Center, Technical University of Catalonia, ETSEIAT, c/ Colom 11, 08222 Terrassa, Spain<sup>b</sup> Johann Bernoulli Institute for Mathematics and Computing Science, University of Groningen, P.O. Box 407, 9700 AK Groningen, The Netherlands<sup>c</sup> Termo Fluids, S.L., c/ Magí Colet 8, 08204 Sabadell, Spain

## ARTICLE INFO

*Article history:*

Received 19 November 2012

Received in revised form 16 September 2013

Accepted 17 October 2013

Available online 24 October 2013

*Keywords:*Symmetry-preserving discretization  
Collocated formulation  
Unstructured grid  
Checkerboard  
Regularization  
Differentially heated cavity

## ABSTRACT

A fully-conservative discretization is presented in this paper. The same principles followed by Verstappen and Veldman (2003) [3] are generalized for unstructured meshes. Here, a collocated-mesh scheme is preferred over a staggered one due to its simpler form for such meshes. The basic idea behind this approach remains the same: mimicking the crucial symmetry properties of the underlying differential operators, *i.e.*, the convective operator is approximated by a skew-symmetric matrix and the diffusive operator by a symmetric, positive-definite matrix. A novel approach to eliminate the checkerboard spurious modes without introducing any non-physical dissipation is proposed. To do so, a fully-conservative regularization of the convective term is used. The supraconvergence of the method is numerically showed and the treatment of boundary conditions is discussed. Finally, the new discretization method is successfully tested for a buoyancy-driven turbulent flow in a differentially heated cavity.




© 2013 Elsevier Inc. All rights reserved.

# Conservative Level Set method

$$\text{Single phase} \left\{ \begin{array}{l} \frac{\partial \vec{u}}{\partial t} + (\vec{u} \cdot \nabla) \vec{u} = \nu \nabla^2 \vec{u} - \nabla p \quad \nabla \cdot \vec{u} = 0 \\ \Omega \frac{d \mathbf{u}_h}{dt} + \mathbf{C}(\mathbf{u}_h) \mathbf{u}_h = \mathbf{D} \mathbf{u}_h - \Omega \mathbf{G} p_h \quad \mathbf{M} \mathbf{u}_h = 0_h \end{array} \right.$$

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu \mathcal{S}(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the **Conservative Level Set (CLS)** proposed by Olsson and Kreiss (JCP'05)}$$





$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$



# Conservative Level Set method

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the **Conservative Level Set (CLS)** proposed by Olsson and Kreiss (JCP'05)}$$

$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

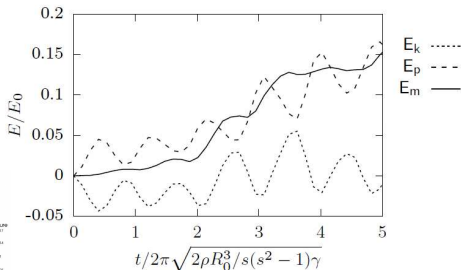

Mechanical energy (kinetic+potential) is not preserved!



# First variation of area

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the **Convervative Level Set (CLS)** proposed by Olsson and Kreiss (JCP'05)}$$

$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

$$A = \int_{\Gamma} dA = \int_{\Omega} \delta(r) dV = \int_{\Omega} \nabla H(r) \cdot \vec{n} dV$$

$$\frac{d}{dt} \int_{\Gamma} dA = - \int_{\Gamma} \kappa \vec{u} \cdot \vec{n} dA \quad \leftarrow \text{First variation of area}$$



# First variation of area

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the **Convervative Level Set (CLS)** proposed by Olsson and Kreiss (JCP'05)}$$

$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

$$A = \int_{\Gamma} dA = \int_{\Omega} \delta(r) dV = \int_{\Omega} \nabla H(r) \cdot \vec{n} dV$$

Helmholtz's  
free energy



$$dF = \gamma dA$$

$$\rightarrow \frac{dE_p}{dt} = \frac{d}{dt} \int_{\Gamma} dF = \gamma \frac{d}{dt} \int_{\Gamma} dA = -\gamma \int_{\Gamma} \kappa \vec{u} \cdot \vec{n} dA$$

$$E_k = \langle \vec{u} | \rho \vec{u} \rangle$$

$$\rightarrow \frac{dE_k}{dt} = -2 \langle S | \mu S \rangle + \gamma \int_{\Gamma} \kappa \vec{u} \cdot \vec{n} dA$$

$$\frac{dE_m}{dt} = \frac{dE_k}{dt} + \frac{dE_p}{dt} = -2 \langle S | \mu S \rangle$$

First variation of area

## From sharp to smooth...

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the } \mathbf{Convervative Level Set (CLS)} \right.$$

proposed by Olsson and Kreiss (JCP'05)

$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

$$A = \int_{\Gamma} dA = \int_{\Omega} \delta(r) dV = \int_{\Omega} \nabla H(r) \cdot \vec{n} dV$$

$$A = \int_{\Omega} \nabla H(r) \cdot \vec{n} dV \approx \int_{\Omega} \nabla \theta \cdot \vec{n} dV = \int_{\Omega} |\nabla \theta| dV = \tilde{A}$$

Smooth area 

$$\frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \quad \xrightarrow{\nabla} \quad \frac{\partial \nabla \theta}{\partial t} + (\vec{u} \cdot \nabla) \nabla \theta = -\nabla \vec{u} \cdot \nabla \theta$$

$$\frac{d}{dt} \int_{\Gamma} dA \approx \frac{d\tilde{A}}{dt} = \frac{d}{dt} \langle \nabla \theta | \vec{n} \rangle = -\langle \nabla \vec{u} \cdot \nabla \theta | \vec{n} \rangle$$

$$-\int_{\Gamma} \kappa \vec{u} \cdot \vec{n} d\tilde{A} = \int_{\Gamma} (\nabla \cdot \vec{n}) \vec{u} \cdot \vec{n} d\tilde{A} = \langle \nabla \cdot \vec{n} | \vec{u} \cdot \nabla \theta \rangle = -\langle \vec{n} | \nabla \vec{u} \cdot \nabla \theta \rangle$$

# From sharp to smooth...

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the } \mathbf{Convervative Level Set (CLS)} \right.$$

proposed by Olsson and Kreiss (JCP'05)

$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

$$A = \int_{\Gamma} dA = \int_{\Omega} \delta(r) dV = \int_{\Omega} \nabla H(r) \cdot \vec{n} dV$$

$$\frac{d}{dt} \int_{\Gamma} dA = - \int_{\Gamma} \kappa \vec{u} \cdot \vec{n} dA \quad \leftarrow \text{First variation of area}$$

$$\frac{d\tilde{A}}{dt} = \frac{d}{dt} \langle \nabla \theta | \vec{n} \rangle = - \langle \nabla \vec{u} \cdot \nabla \theta | \vec{n} \rangle = - \int_{\Gamma} \kappa \vec{u} \cdot \vec{n} d\tilde{A}$$

$$\tilde{A} = \int_{\Omega} |\nabla \theta| dV \quad \leftarrow \text{First variation of (smooth) area}$$

## From smooth to discrete...

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the } \mathbf{Convervative Level Set (CLS)} \right.$$

proposed by Olsson and Kreiss (JCP'05)

$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

$$\frac{d\tilde{A}}{dt} = \frac{d}{dt} \langle \nabla \theta | \vec{n} \rangle = -\langle \nabla \vec{u} \cdot \nabla \theta | \vec{n} \rangle = -\int_{\Gamma} \kappa \vec{u} \cdot \vec{n} d\tilde{A}$$

$$\frac{d}{dt} \langle G \theta_c | n_s \rangle_F = \langle U G \theta_c | k_s \rangle_F \quad \text{where} \quad k_s = Y k_c = Y \underbrace{\Omega_c^{-1} M n_s}_{k_c}$$

and  $U = \text{diag}(u_s)$

$$\frac{d}{dt} \langle G \theta_c | n_s \rangle_F = -\left( \frac{d\theta_c}{dt} \right)^T M n_s = -\theta_c^T G^T U \Omega_s \underbrace{Y \Omega_c^{-1} M n_s}_{k_s}$$



# From smooth to discrete...

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the } \mathbf{Convervative Level Set (CLS)} \right.$$

proposed by Olsson and Kreiss (JCP'05)

$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

$$\frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \xrightarrow{\text{FVM}} \Omega_c \frac{d\theta_c}{dt} + C(u_s) \theta_c = 0_c$$

traspose eq.

$$-\left(\frac{d\theta_c}{dt}\right)^T \Omega_c = \theta_c^T C^T(u_s)$$

$$-C^T(u_s) = -G^T U \Omega_s \mathbf{Y}$$

$$\frac{d}{dt} \langle G \theta_c | n_s \rangle_F = -\left(\frac{d\theta_c}{dt}\right)^T M n_s = -\theta_c^T G^T U \Omega_s \underbrace{\mathbf{Y} \Omega_c^{-1} M n_s}_{k_s}$$

## From smooth to discrete...

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the } \mathbf{Conservative Level Set (CLS)} \text{ proposed by Olsson and Kreiss (JCP'05)}$$

Discrete Multiphase  
 $\rho = 1$  (to simplify notation)


$$\left\{ \begin{array}{l} \Omega_s \frac{du_s}{dt} + C_s(u_s)u_s = D u_s - \Omega_s G p_c + \gamma K_s G \theta_c \quad M u_s = 0_c \\ \Omega_c \frac{d\theta_c}{dt} + C(u_s)\theta_c = 0_c \end{array} \right. \quad \kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

where  $K_s = \text{diag}(\mathbf{Y} k_c)$ 

$$-C^T(u_s) = -G^T U \Omega_s \mathbf{Y}$$



$$C(u_s) = M U (\Pi + \Lambda) = M U \mathbf{Y}^T$$




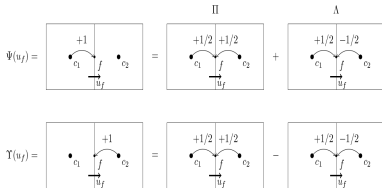


E.g. Upwind for  $C(u_s)$  implies  
Downwind for  $\mathbf{Y} = \Pi - \Lambda$

# Results: inviscid oscilating bubble

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the } \mathbf{Convervative Level Set (CLS)} \text{ proposed by Olsson and Kreiss (JCP'05)}$$

$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

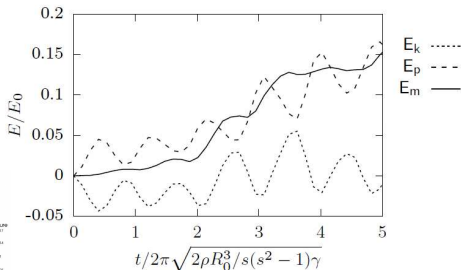





Mechanical energy (kinetic+potential) is not preserved!

# Results: inviscid oscillating bubble

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the } \mathbf{Conservative Level Set (CLS)} \text{ proposed by Olsson and Kreiss (JCP'05)}$$

$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

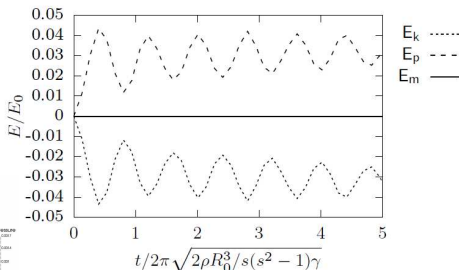



Mechanical energy (kinetic+potential) is **preserved!**

# Results: inviscid static bubble

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the } \mathbf{Conservative Level Set (CLS)} \text{ proposed by Olsson and Kreiss (JCP'05)}$$

$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

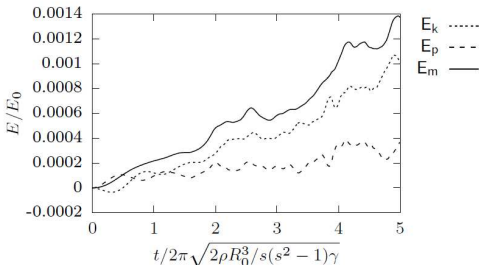



Mechanical energy (kinetic+potential) is not preserved!

# Results: inviscid static bubble

$$\text{Multiphase} \left\{ \begin{array}{l} \rho \frac{\partial \vec{u}}{\partial t} + \rho (\vec{u} \cdot \nabla) \vec{u} = \nabla \cdot (2\mu S(\vec{u})) - \nabla p + \gamma \kappa \cdot \vec{n} \quad \nabla \cdot \vec{u} = 0 \\ \frac{\partial \theta}{\partial t} + (\vec{u} \cdot \nabla) \theta = 0 \end{array} \right. \leftarrow \text{essential idea of the **Conservative Level Set (CLS)** proposed by Olsson and Kreiss (JCP'05)}$$

$$\kappa = -\nabla \cdot \vec{n} \quad \text{where} \quad \vec{n} = \frac{\nabla \theta}{|\nabla \theta|}$$

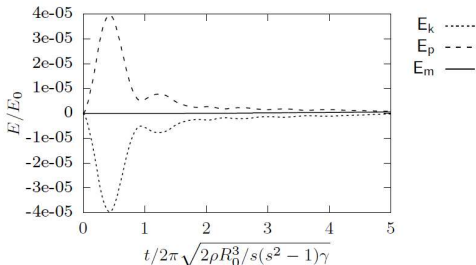

Mechanical energy (kinetic+potential) is **preserved!**

# Paper submitted

## An energy-preserving level set method for multiphase flows

N. Valle<sup>a</sup>, F.X. Trias<sup>a</sup>, J. Castro<sup>a</sup>




<sup>a</sup>*Heat and Mass Transfer Technological Centre (CTTC), Universitat Politècnica de Catalunya - BarcelonaTech (UPC), ESEIAAT, Carrer Colom 11, 08222 Terrassa (Barcelona)*

---

### Abstract



The computation of multiphase flows presents a subtle energetic equilibrium between potential (i.e., surface) and kinetic energies. The use of traditional interface-capturing

# CTTC's historical background in HPC

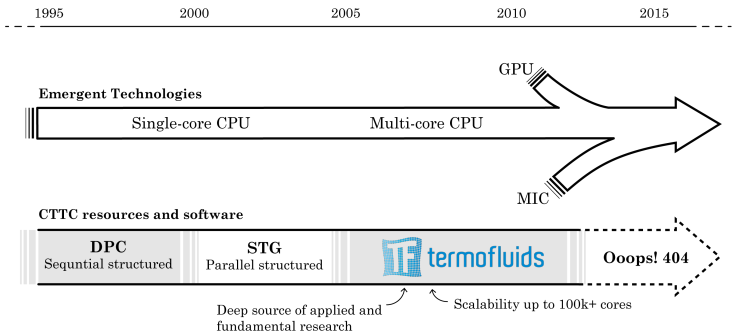




# Divergence of HPC systems

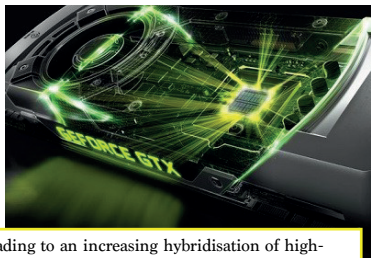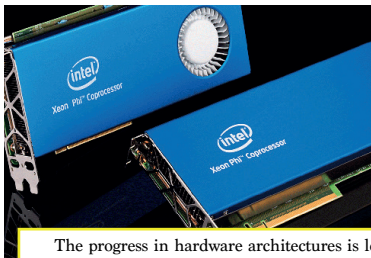

The progress in hardware architectures is leading to an increasing hybridisation of high-performance computing (HPC) systems, making the design of computing applications a rather complex problem, and is affecting most of the fields that rely on large-scale simulations.



# Divergence of HPC systems

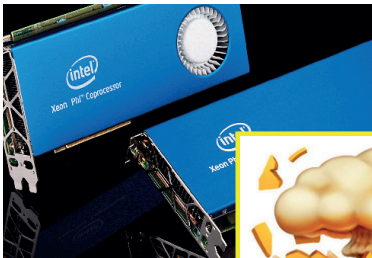

# Fully-portable implementation models

Is it **necessary** to use the new hardware architectures?

- In our opinion, **yes**. New hardware is designed to overcome the power constraint in the context of the **exascale** challenge.

# Fully-portable implementation models

Is it **necessary** to use the new hardware architectures?

- In our opinion, **yes**. New hardware is designed to overcome the power constraint in the context of the **exascale** challenge.

Do the **traditional** implementation models facilitate code portability?

- In our opinion, **no**. **Legacy codes** were **not designed for** providing **portability** simply because it was not necessary.

# Fully-portable implementation models

Is it **necessary** to use the new hardware architectures?

- In our opinion, **yes**. New hardware is designed to overcome the power constraint in the context of the **exascale** challenge.

Do the **traditional** implementation models facilitate code portability?


- In our opinion, **no**. **Legacy codes** were **not designed for** providing **portability** simply because it was not necessary.

Do we need to **change** the way we look at scientific computing in general?

- In our opinion, **yes**. Making an effort to design modular applications composed of a **reduced number of independent and well-defined code blocks** helps to reduce the generation of errors and facilitates debugging and **portability**.

# My basic blocks: matrices and vectors!

$$\Omega \frac{d u_h}{dt} + C(u_h) u_h = D u_h - \Omega G p_h \quad M u_h = 0_h$$



$$T = \begin{pmatrix} \times & 0 & 0 & \times & \times & 0 \\ 0 & \times & \times & \times & 0 & \times \\ 0 & \times & \times & 0 & 0 & \times \\ \times & \times & 0 & \times & 0 & 0 \\ \times & 0 & 0 & 0 & \times & \times \\ 0 & \times & \times & 0 & \times & \times \end{pmatrix}$$

$$\Omega = \begin{pmatrix} \Omega_u & \\ & \Omega_v \end{pmatrix}$$

$$M = \begin{pmatrix} M^u & M^v \end{pmatrix}$$

$$C = \begin{pmatrix} C_u & \\ & C_v \end{pmatrix}$$

$$\Omega G = -M^T$$

$$G = \begin{pmatrix} G^x \\ G^y \end{pmatrix}$$

$$D_u = D_v = M G = -M \Omega^{-1} M^T$$

$$D = \begin{pmatrix} D_u & \\ & D_v \end{pmatrix}$$

# Fully-portable implementation models

## Stencil-based

Traditionally, the stencil-based implementations are used by the scientific computing community. These implementations arise straightforward from the formulation of the numerical method. However, they require **specific stencil sweeps and data structures** for each numerical method.


## Algebra-based

Algebra-based implementations only rely on a reduced number of **universal algebraic kernels and data structures**, allowing the use of standard optimised libraries and, therefore, providing portability. As a counterpart, the formulation of the numerical method becomes more complex and could even lead to an increase in the number of operations.



# The HPC<sup>2</sup> fully-portable, algebra-based framework


The HPC<sup>2</sup> (Heterogeneous Portable Code for HPC) is a fully-portable, algebra-based framework with a multilevel MPI+OpenMP+OpenCL+CUDA parallelisation. Naturally provides **modularity and portability**.

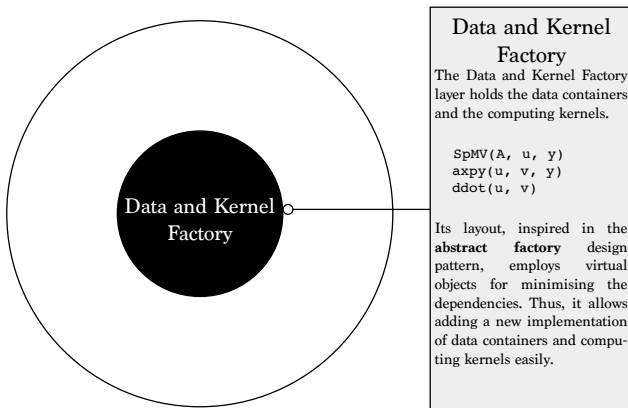




# The HPC<sup>2</sup> fully-portable, algebra-based framework

The HPC<sup>2</sup> (Heterogeneous Portable Code for HPC) is a fully-portable, algebra-based framework with a multilevel MPI+OpenMP+OpenCL+CUDA parallelisation. Naturally provides **modularity and portability**.

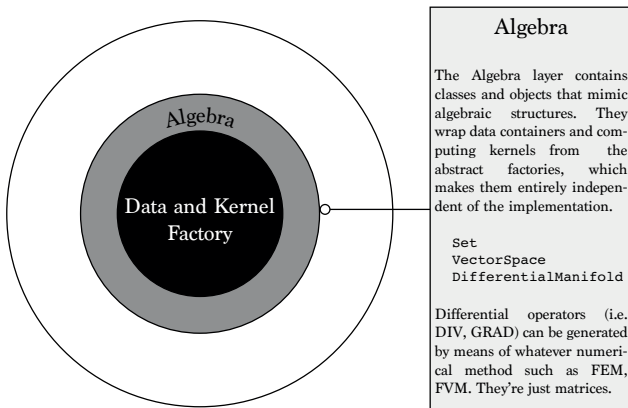


# The HPC<sup>2</sup> fully-portable, algebra-based framework

The HPC<sup>2</sup> (Heterogeneous Portable Code for HPC) is a fully-portable, algebra-based framework with a multilevel MPI+OpenMP+OpenCL+CUDA parallelisation. Naturally provides **modularity and portability**.

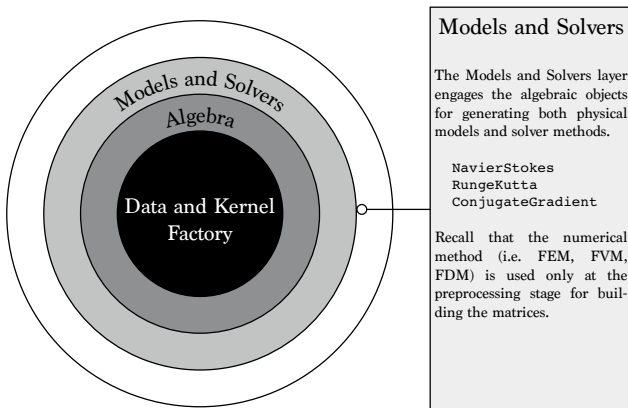

# The HPC<sup>2</sup> fully-portable, algebra-based framework



The HPC<sup>2</sup> (Heterogeneous Portable Code for HPC) is a fully-portable, algebra-based framework with a multilevel MPI+OpenMP+OpenCL+CUDA parallelisation. Naturally provides **modularity and portability**.

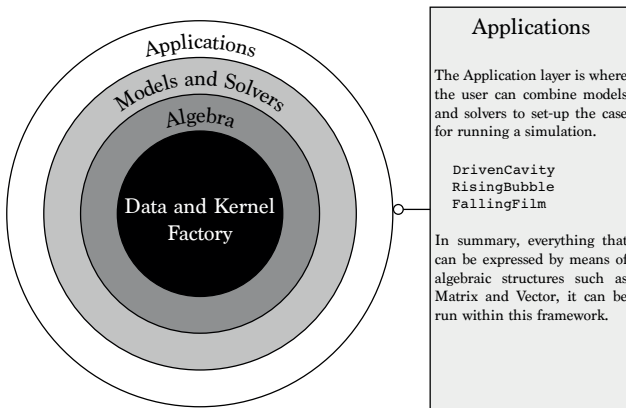

# A performance overview of the HPC<sup>2</sup>

## Study case 1


**Single-device performance** of the SpMV kernel vs the matrix size on an Intel Xeon E5649 (left) and Nvidia M2090 (right) for a matrix derived from a symmetry-preserving discretisation<sup>1</sup> on an unstructured hex-dominant mesh.

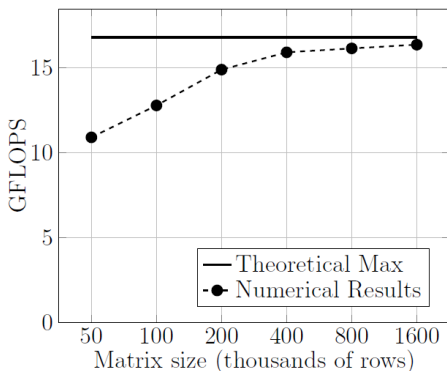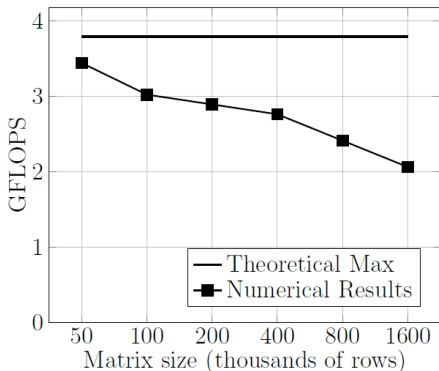

# A performance overview of the HPC<sup>2</sup>

## Study case 1

**Single-device performance** of the SpMV kernel vs the matrix size on an Intel Xeon E5649 (left) and Nvidia M2090 (right) for a matrix derived from a symmetry-preserving discretisation<sup>1</sup> on an unstructured hex-dominant mesh.

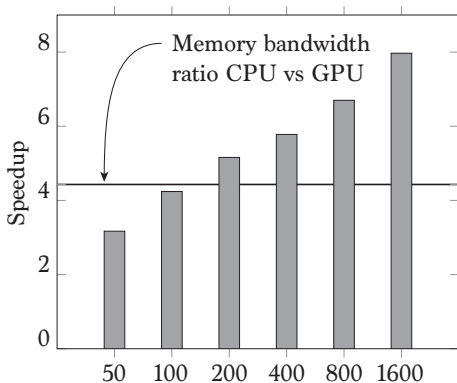


### CPU vs GPU

In memory-bounded applications, the GPU performance improves with the size of the matrix, in contrast with that of the CPU. Hence, the speedup depends on both the matrix size and the memory bandwidth.

# A performance overview of the HPC<sup>2</sup>

## Study case 2



**Single-device performance** comparison of the algebraic DNS algorithm using the symmetry-preserving discretisation<sup>2</sup> on an unstructured hex-dominant mesh of 1M cells.

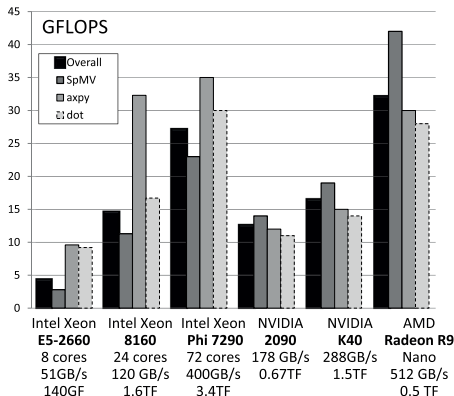

# A performance overview of the HPC<sup>2</sup>

## Study case 3

**Heterogeneous performance study** of the SpMV kernel on a hybrid node equipped with an Intel E5 2697v3 and an Nvidia Tesla K40 for a matrix derived from a symmetry-preserving discretisation<sup>3</sup> on an unstructured hex-dominant mesh of 10M cells. On the left, the single-node performance study. On the right, the strong-scaling study.

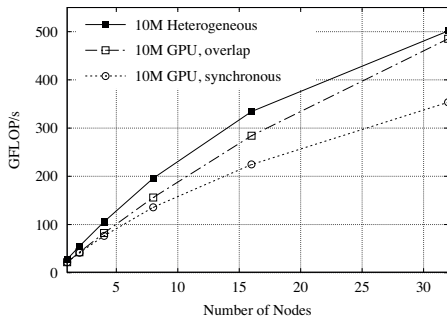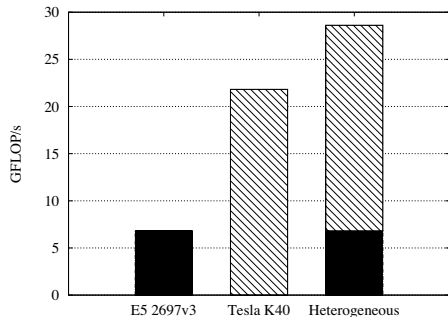



ELSEVIER

Contents lists available at ScienceDirect

## Computers and Fluids

journal homepage: [www.elsevier.com/locate/compfluid](http://www.elsevier.com/locate/compfluid)

## HPC<sup>2</sup>—A fully-portable, algebra-based framework for heterogeneous computing. Application to CFD



X. Álvarez<sup>a,\*</sup>, A. Gorobets<sup>a,b</sup>, F.X. Trias<sup>a</sup>, R. Borrell<sup>a,c</sup>, G. Oyarzun<sup>a</sup>

<sup>a</sup> Heat and Mass Transfer Technological Center, Technical University of Catalonia, C/ Colom 11, Terrassa (Barcelona) 08222, Spain

<sup>b</sup> Keldysh Institute of Applied Mathematics RAS, Miusskaya Sq. 4, Moscow 125047, Russia

<sup>c</sup> Termo Fluids, S.L., C/ Magi Colet 8, Sabadell (Barcelona), 08024, Spain

### ARTICLE INFO

#### Article history:

Received 2 November 2017

Accepted 23 January 2018

Available online 10 February 2018

#### Keywords:

Heterogeneous computing

MPI+OpenMP+OpenCL

Hybrid CPU+GPU systems

CFD

Symmetry-preserving discretization

### ABSTRACT

The variety of computing architectures competing in the exascale race makes the portability of codes of major importance. In this work, the HPC<sup>2</sup> code is presented as a fully-portable, algebra-based framework suitable for heterogeneous computing. In its application to CFD, the algorithm of the time-integration phase relies on a reduced set of only three algebraic operations: the sparse matrix-vector product, the linear combination of vectors and the dot product. This algebraic approach combined with a multilevel MPI+OpenMP+OpenCL parallelization naturally provides portability. The performance has been studied on different architectures including multicore CPUs, Intel Xeon Phi accelerators and GPUs of AMD and NVIDIA. The multi-GPU scalability is demonstrated up to 256 devices. The heterogeneous execution is tested on a CPU+GPU hybrid cluster. Finally, results of the direct numerical simulation of a turbulent flow in a 3D air-filled differentially heated cavity are presented to show the capabilities of the HPC<sup>2</sup> dealing with large-scale CFD simulations.

© 2018 Elsevier Ltd. All rights reserved.



## Concluding remarks

- Symmetry-preserving discretization is based on a **very reduced set of operators (matrices)**. The rest follow straightforwardly by preserving fundamental symmetries.
- Preserving operators symmetries leads to **numerical stability** (in the L2-norm sense).
- A new **energy-preserving** level set method for **multiphase flows** has been proposed.
- An algebra-based approach naturally provides **modularity and portability**.

## Concluding remarks

- Symmetry-preserving discretization is based on a **very reduced set of operators (matrices)**. The rest follow straightforwardly by preserving fundamental symmetries.
- Preserving operators symmetries leads to **numerical stability** (in the L2-norm sense).
- A new **energy-preserving** level set method for **multiphase flows** has been proposed.
- An algebra-based approach naturally provides **modularity and portability**.

Takeaway message:

- Differential **calculus** and **linear algebra** are intimately connected.

# Thank you for your attention